


ECOPHON SOLO™ CIRCLE

Solo Circle is a free hanging unit, offering high level design possibilities. Three different suspension systems offer opportunities to create several layers and angles. Suitable when the room volume should be maintained or when it's not possible to install a wall-to-wall ceiling.



Ecophon Solo™ Circle

SYSTEM RANGE



Size, mm	Ø800	Ø1200
Special Fixing	•	•
Thickness (THK)	40	40
Inst. Diagr.	M411	M410




Solo Circle



Suspension with Connect Adjustable wire hanger and Connect Absorber anchor



Suspension with Connect Absorber bracket and Connect Absorber anchor



Suspension with One-point fixing

TYPE OF APPLICATION

- Healthcare
- Office




ACOUSTICS

The values in the diagram refer to a single unit. If the units are arranged in a cluster with distances between units less than 0,5 meters, the Aeq per unit will be slightly reduced.

Sound Absorption

Test results according to EN ISO 354.


A_{eq}, Equivalent absorption area per unit (m² sabin)

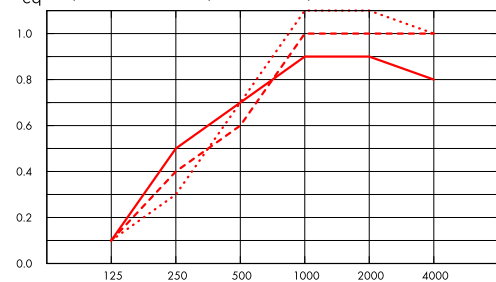

- Solo Circle Ø800, 200 mm o.d.s.
 - - - Solo Circle Ø800, 400 mm o.d.s.
 - ⋯ Solo Circle Ø800, 1000 mm o.d.s.
- o.d.s = overall depth of system

Frequency
Hz

A_{eq}, Equivalent absorption area per unit (m² sabin)

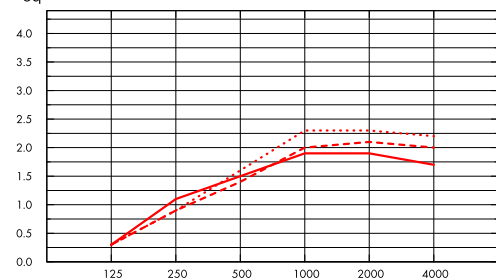

- Solo Circle Ø1200, 200 mm o.d.s.
 - - - Solo Circle Ø1200, 400 mm o.d.s.
 - ⋯ Solo Circle Ø1200, 1000 mm o.d.s.
- o.d.s = overall depth of system

Frequency
Hz

	THK mm	o.d.s. mm	A _{eq} , Equivalent absorption area per unit (m ² sabin)					
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Ø800	40	200	0.1	0.5	0.7	0.9	0.9	0.8
Ø800	40	400	0.1	0.4	0.6	1.0	1.0	1.0
Ø800	40	1000	0.1	0.3	0.7	1.1	1.1	1.0

	THK mm	o.d.s. mm	A _{eq} , Equivalent absorption area per unit (m ² sabin)					
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Ø1200	40	200	0.3	1.1	1.5	1.9	1.9	1.7
Ø1200	40	400	0.3	0.9	1.4	2.0	2.1	2.0
Ø1200	40	1000	0.3	0.9	1.6	2.3	2.3	2.2



INDOOR AIR QUALITY

Certificate / Label	Standard
French VOC	A+
Eurofins Indoor Air Comfort®	IAC



CARBON FOOTPRINT

Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO ₂ equiv/m ²
Solo Circle	10,35



CIRCULARITY

Minimum post-consumer recycled content	53%
Recyclability	Fully recyclable



FIRE SAFETY

The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182.

Country	Fire standard	Class
Europe	EN 13501-1	A2-s1,d0



HUMIDITY RESISTANCE

Class C, relative humidity 95% and 30°C, according to EN 13964:2014



VISUAL APPEARANCE

White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.



CLEANABILITY

Daily dusting and vacuum cleaning. Weekly wet wiping.



ACCESSIBILITY

The tiles are demountable.



INSTALLATION

Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.



PACKAGING INFORMATION

Information is indicative and subject to change.

	Panels / crt
Ø800x40	4
Ø1200x40	4



SYSTEM WEIGHT

Weight information is indicative and subject to variation.

	kg/m ²
Solo Circle	3,5 - 4,6



MECHANICAL PROPERTIES

The tile can take both point loads and distributed loads. See Functional demands, Mechanical properties at www.ecophon.com.




















CE


Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

COLOURS AND DESIGN

Akutex™ FT

 White Frost	 Moonlight sky	 Highland fog	 Sunset heat	 Ocean storm	 Morning drizzle	 Peach rose
 Goji berry	 Scallop shells	 Fresh clover	 Sage garden	 Eucalyptus leaf	 Summer forest	 Golden field
 Ruby rock	 Wet sand	 Silent steam	 Dark diamond	 Cloudy day	 Volcanic ash	 Silver stone
 Silk slate						

Wire, Wire One Point, Direct

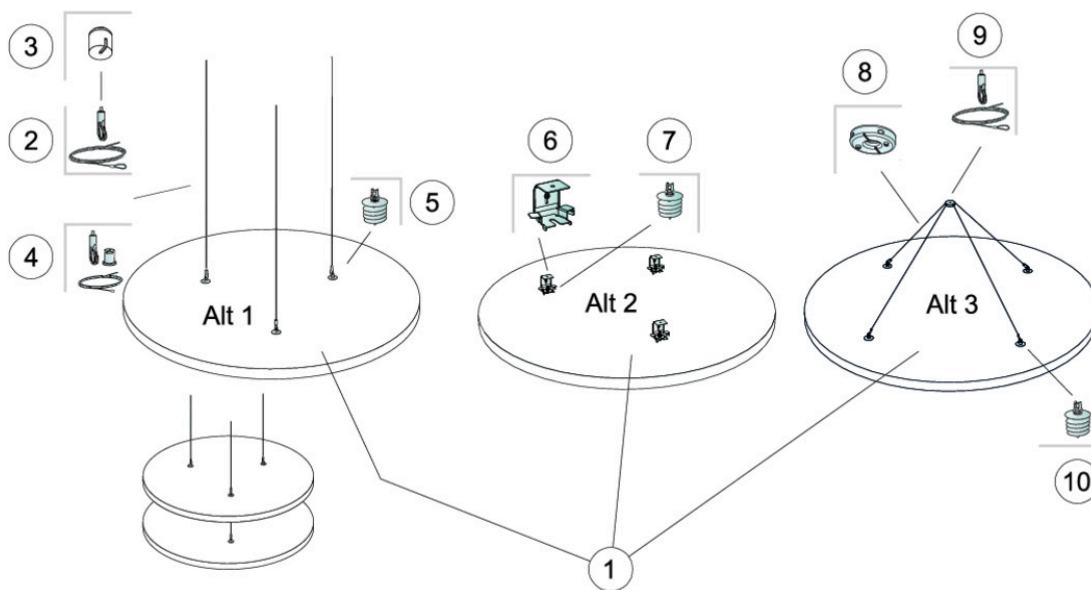


© Saint-Gobain Ecophon AB


Installation diagram (M410) for Ecophon Solo Circle

Quantity specification (excl. wastage)


		Size, mm
		Ø1200
1	Solo Circle	1,13m ² /panel
Mounting Option 1		
2	Connect Looped Wire Hanger (Hook + Looped wire)	3/panel
3	Connect Covering cup (Optional)	3/panel
4	Connect Wire Kit (Hook + Ceiling holder + Wire)	3/panel
5	Connect Absorber anchor	3/panel
Mounting Option 2		
6	Connect Absorber bracket (Alt 2)	3/panel
7	Connect Absorber anchor	3/panel
Mounting Option 3		
8	Connect One-point fixing (Alt 3)	1/panel
9	Connect Looped Wire Hanger (Hook + Looped wire)	2/panel
10	Connect Absorber anchor	4/panel
Δ Min. overall depth of system: Δ1 140 mm / Δ2 90 mm / Δ3 500 mm		




See Quantity specification



Two types of Adjustable wire solutions




Panels can be suspended underneath each other



Panels can be installed in angles

Wire, Direct

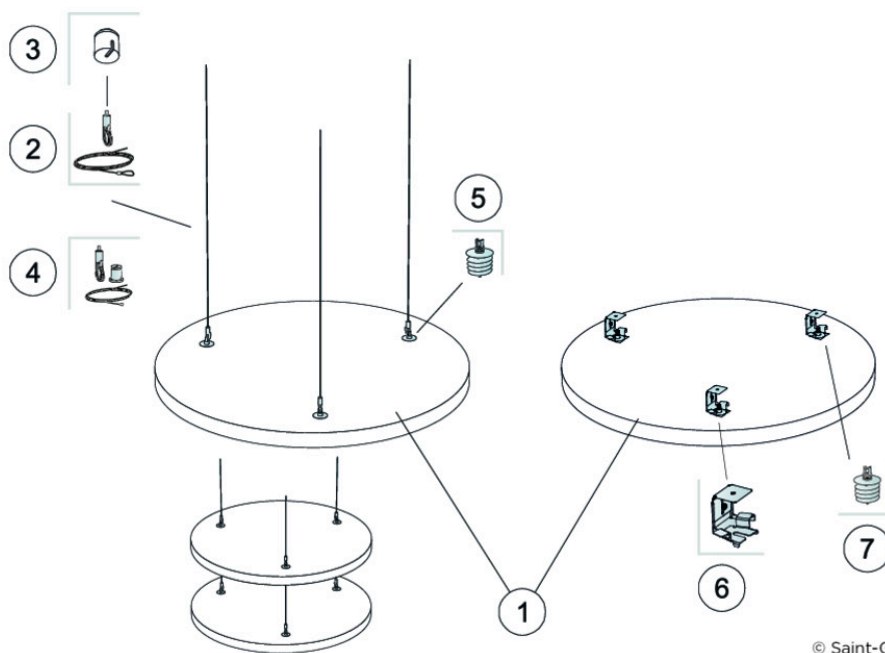


© Saint-Gobain Ecophon AB


Installation diagram (M411) for Ecophon Solo Circle

Quantity specification (excl. wastage)


		Size, mm
		Ø800
1	Solo Circle	0,5m ² /panel
Mounting Option 1		-
2	Connect Looped Wire Hanger (Hook + Looped wire)	3/panel
3	Connect Covering cup (Optional)	3/panel
4	Connect Wire Kit (Hook + Ceiling holder + Wire)	3/panel
5	Connect Absorber anchor	3/panel
Mounting Option 2		-
6	Connect Absorber bracket (Alt 2)	3/panel
7	Connect Absorber anchor	3/panel
Δ Min. overall depth of system: Δ1 140 mm / Δ2 90 mm		




See Quantity specification



Two types of Adjustable wire solutions



Panels can be suspended underneath each other



Panels can be installed in angles